9 Litre Alcoseal Foam Stored Pressure

Extinguisher

Technical Specification	
Extinguisher Code	F9S
Extinguishant	Alcoseal Foam
Propellant Type	Stored Pressure
Capacity	9 Ltr
Paint Primer/Finish	Polyester Powder Paint
Paint Colour	Signal Red (RAL 3000)
Colour Coding to BS7863	Pale Cream (RAL 1014)
Fire Class	A, B
Fire Rating	13A/183B
Operating Temperature	+5 to +60°C
Test Pressure	23 Bar
Operating Pressure at 20°C	12.5 Bar
Discharge Duration	46 sec
Discharge Range	4 m
Cylinder	Mild Steel 1.6mm to EN 10111-DD12
Operating Valve	Diecast Zinc Alloy to EN 1774-Zn A14 (ZL3)
Cylinder Lining	Polymer
Height	584 mm
Diameter	190 mm
Full Weight	15.3 kg
Empty Weight (excluding cartridge)	6.0 kg
Nominal Carton Size	200 x 200 x 590 mm
Approval	BS EN 3/BAFE

Licence No.KM6832

BS EN 3 APPROVED

Spare Parts

Item	Description	Part No
1	Headcap assembly c/w hose and pick-up tube	MBRH 1050
2	Headcap 'O' ring seal	MBRH 0230
3	Safety pin	MBRH 0180
4	Safety pin cap	MBRH 0165
5	Break Tie Indicator	XE 18798
6	Service indicator	MBRH 0185
-	Wall bracket (not shown)	MBRH 0195
-	Transport bracket and strap (not shown)	MBRH 0310
-	Alcoseal foam charge	XF 0705BO

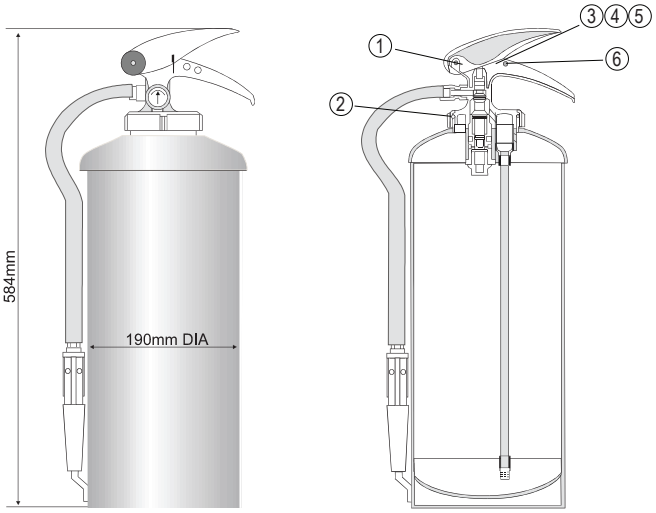

INTERNATIONAL SALES
Angus Fire Ltd
Angus House, Haddenham Business Park,
Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK
Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

UK SALES
Angus Fire Ltd
Station Road, Bentham, Lancaster, LA2 7NA, UK
Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Email: general.enquiries@angusuk.co.uk • Web: www.angusfire.co.uk

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.

© Angus Fire
5292/3 02.14