





# 100 Litre AFFF Foam Mobile Fire Extinguisher

Corrosion often occurs where the support frame is welded to the cylinder causing it to be unsafe. Angus Fire mobiles use a wrap around frame to support the cylinder. During maintenance the frame can be removed for servicing or repair.

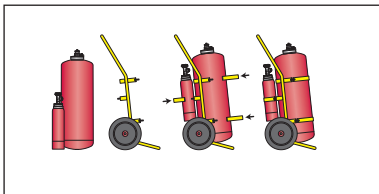

A swivel is fitted as standard on all Angus Fire mobiles between the discharge hose and the nozzle. When the coiled hose is unwound the hose can un-twist leaving the nozzle free to direct the jet.

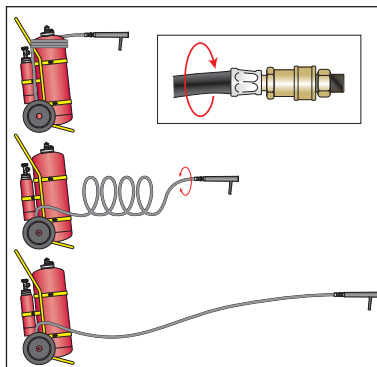

## Options:

Dust cover  
Extra length discharge hose 7.5m or 10m  
Rigid 2m helicopter lance  
CO<sub>2</sub> propellant in place of N<sub>2</sub> Teflon foil bursting disc  
MED Approval



The full range of Angus mobile

extinguishers includes:

50 l; 100 l AFFF Foam

50 kg; 75 kg; 100 kg ABC powder

35 kg; 50 kg; 70 kg Monnex™ powder

10 kg; 20 kg; 30 kg; 50 kg CO<sub>2</sub>

## INTERNATIONAL SALES

### Angus Fire Ltd

Angus House, Haddenham Business Park,  
Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK  
Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

## UK SALES

### Angus Fire Ltd

Station Road, Bentham, Lancaster, LA2 7NA, UK  
Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.