





# 35 Kg Monnex™ Mobile Fire Extinguisher

Corrosion often occurs where the support frame is welded to the cylinder causing it to be unsafe. Angus Fire mobiles use a wrap around frame to support the cylinder. During maintenance the frame can be removed for servicing or repair.

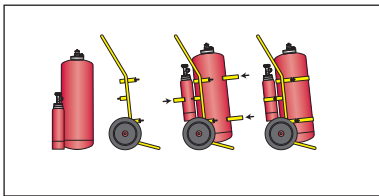

A swivel is fitted as standard on all Angus Fire mobiles between the discharge hose and the nozzle. When the coiled hose is unwound the hose can un-twist leaving the nozzle free to direct the jet.

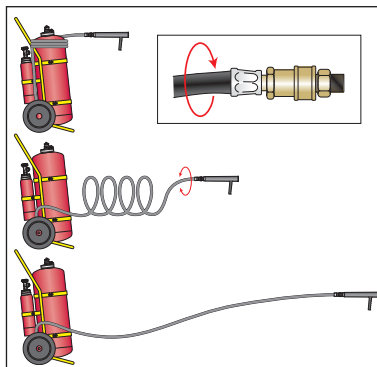

## Options:

- Dust cover
- Extra length discharge hose 7.5m or 10m
- Rigid 2m helicopter lance
- Marine paint finish (minimum quantities)
- CO<sub>2</sub> propellant in place of N<sub>2</sub>
- Aluminium foil bursting disc

The full range of Angus mobile extinguishers includes:

- 50 l; 100 l AFFF Foam
- 50 kg; 75 kg; 100 kg ABC powder
- 35 kg; 50 kg; 70 kg Monnex™ powder
- 10 kg; 20 kg; 30 kg; 50 kg CO<sub>2</sub>

## INTERNATIONAL SALES

**Angus Fire Ltd**  
 Angus House, Haddenham Business Park,  
 Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK  
 Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

## UK SALES

**Angus Fire Ltd**  
 Station Road, Bentham, Lancaster, LA2 7NA, UK  
 Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.

© Angus Fire  
 6604/5 05.16