

# 5 Kg Carbon Dioxide Alloy Stored Pressure Extinguisher




## Technical Specification

Extinguisher Code	CA5HH
Extinguishant	Carbon Dioxide CO <sub>2</sub>
Propellant Type	Stored Pressure
Capacity	5 kg
Paint Primer/Finish	Polyester Powder Paint
Paint Colour	Signal Red (RAL 3000)
Colour Coding to BS7863	Black (RAL 9005)
Fire Class	B + Electrical
Fire Rating	70B
Operating Temperature	-20 to +60°C
Test Pressure	250 Bar
Operating Pressure at 20°C	50 Bar
Discharge Duration	13 sec
Discharge Range	3 m
Cylinder	Aluminium Alloy
Operating Valve	Brass
Discharge Nozzle	Hose & Horn
Height	660 mm
Diameter	152 mm
Full Weight	11.6 kg
Empty Weight (excluding cartridge)	6.6 kg
Nominal Carton Size	207 x 185 x 754 mm
Approval	BS EN 3/BAFE

## Spare Parts

Item	Description	Part No
A	Hose & Horn	MBC 030
B	Brass Parallel Valve	MVLV 0015
-	Pull Tight Seal (not shown)	XE 18798
-	Wall Bracket (not shown)	MBRH 0550

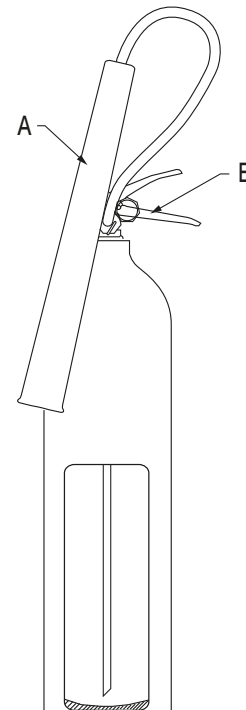

Licence No.XM 611605

## INTERNATIONAL SALES

**Angus Fire Ltd**  
Angus House, Haddenham Business Park,  
Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK  
Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

## UK SALES

**Angus Fire Ltd**  
Station Road, Bentham, Lancaster, LA2 7NA, UK  
Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.

© Angus Fire  
5320/4 09.15